

# DOT SIGHTS & MAGNIFIERS

## CONFIDENCE SQUARED AWAY.

Effective targeting solutions for both long guns and handguns. Mounted directly, our wide selection of MRDS (Micro Reflex Dot Sights) are quick to install on the most popular of optics-ready double-stack or single-stack pistols with versatile mounting options available for installation on a variety of long gun applications. Follow through with confidence shot-to-shot with our long gun closed-emitter dot sights with models available in single-dot, T-dot, or circle-dot reticles. Looking to touch out farther? Pair one with our 3X flip-to-side magnifier.



## JUMP TO A SERIES

- | **UTG® ACCU-SYNC™ DOT SIGHTS [NEW]** 058
  - DS2521R for Mini ACOG® Footprint 059
  - DS2018R for Mini ACOG® Footprint 059
- | **UTG PRO® MRDS [NEW]** 060
- | **UTG® OP3 MICRO MRDS**
  - Mini Micro MRDS for SHIELD RMSC Footprint 062
  - MRDS/SL/SLS for DOCTER® Footprint 063
  - MRDS/SLS for RMR® Footprint 063
- | **UTG® ITA DOT SIGHTS** 064
- | **UTG® 3X FLIP-TO-SIDE MAGNIFIER** 064

(THIRD PARTY TRADEMARKS MAY BE USED IN THIS CATALOG FOR USER CONVENIENCE TO INDICATE THE FIT OR COMPATIBILITY OF THE APPLICABLE PRODUCT.)





# ACCURACY SYNCHRONIZED ACCU-SYNC™

## ACCU-SYNC® DOT SIGHTS

UTG® ACCU-SYNC™ dot sights come in a compact and subcompact size and feature a red illuminated 3 MOA dot with 8 manually adjusted brightness intensity settings to choose from. Illumination memory conveniently gets users right back to the last brightness setting used upon activation. Fully sealed, ACCU-SYNC™ dot sights are IPX7 waterproof rated and constructed from matte black anodized 6061-T6 aluminum. Optimized for low power consumption and powered by a single CR2032 battery, a 30,000+ hour battery life (at middle brightness) comes standard.

The mounting base uses the common mini ACOG® footprint and is configured for a lower 1/3 co-witness out of the box. Removing the included riser drops the height down to that of a low mount providing users two commonly used height profiles for different firearm applications. In addition, the base features squared recoil stops and our QR (quick release) mount, making for a quick installation and removal, reliable return to zero, and is compatible with Picatinny rails with widths that may even be out of spec. Tool-free tension adjustment is locked in place via a gear and spring-loaded locking lever interface, allowing users to set it once and forget it.

### QUICK TO ACQUIRE

Red 3 MOA Dot with 8 Brightness Settings and 30,000+ Hours Battery Life



### ACCU-SYNC® QR

Low Profile Quick Release (QR) Mount with Tool-free Tension Adjustment



### SHOOTER CONFIGURABLE

Configured for a Lower 1/3 Co-witness and is Mini ACOG® Footprint Compatible



### RELIABLE CONSTRUCTION

IPX7 Waterproof Rated, Precision Machined from Matte Black 6061-T6 Aluminum with Impact Resistant Tempered Glass Lens



# ACCU-SYNC™ 2018R & 2521R DOT SIGHTS



**ACCU-SYNC® 2018R**  
Manual Brightness  
Mini ACOG® Footprint / Red 3 MOA / OP-DS2018R

**ACCU-SYNC® 2521R**  
Manual Brightness  
Mini ACOG® Footprint / Red 3 MOA / OP-DS2521R

## ACCU-SYNC™ 2018R & 2521R DOT SIGHTS NEW

- » Precision Machined from 6061-T6 Aluminum and Finished in a Matte Black Anodization
- » Wide Field of View Lens Diameter
- » Impact Resistant Tempered Glass Lens
- » 3 MOA Red Dot with 8 Brightness Settings
- » 30,000+ Hours Battery Life at Middle Brightness Setting
- » Snag-free Flush Turrets with Crisp 1 MOA Per Click Adjustment at 100 Yards
- » IPX7 Waterproof Rated
- » Low Profile Quick Release (QR) Mini ACOG® Mount with Lower 1/3 Co-witness Riser Included

	OP-DS2018R	OP-DS2521R
Lens Diameter	0.75" / 19 mm	0.79" / 20 mm
Reticle / Illumination	Red 3 MOA Dot	Red 3 MOA Dot
Illumination Mode	Manual, 8 Settings	Manual, 8 Settings
Adjustment	1 MOA Per Click	1 MOA Per Click
Material	Anodized AL6061	Anodized AL6061
Battery Type	CR2032 3V	CR2032 3V
Battery Life	30,000+ hrs	30,000+ hrs
Mount Footprint	Mini ACOG®, with Lower 1/3 Co-witness Riser	
Length x Width	2.24" X 1.64"	2.66" X 1.66"
Weight (w/Battery)	5.4 oz	6.1 oz

# UTG PRO® MRDS



AL 7075 Housing / Constant-on Automatic Brightness  
SHIELD RMSC Footprint / Red 3 MOA / OPUMR01

**UTG PRO®**  **NEW**

## MRDS

- » Proudly Designed and Made in USA
- » High Clarity Coated Glass Lens Housed within a Precision Machined Matte Black Anodized 7075-T6 Aluminum Body
- » Constant-on Automatic Brightness Adjusting Red 3 MOA Single Dot
- » IPX7 Waterproof Rated
- » Lower 1/3 Co-witness with Most Standard Height Iron Sights
- » Protective Optic Cover Included
- » Out-of-the-box Compatible with SIG P365X/XL, GLOCK 43X/48 MOS, WALTHER PPS M2 RMSC, SPRINGFIELD ARMORY HELLCAT OSP, RUGER MAX-9, S&W PERFORMANCE CENTER M&P SHIELD M2.0, and Most Other Optics-Ready Pistol Platforms
- » Includes M3, M4, and #6-32 Hardware Screws for Greater Optics-Ready Pistol Platform Compatibility



Windage/Elevation Adjustment



Integral Rear Backup Iron Sight Milled into Body

	<b>OPUMR01</b>
Lens Diameter	0.85" X 0.59"
Reticle / Illumination	Red 3 MOA Dot
Illumination Mode	Automatic, Constant-on
Material	Hard Coat Anodize AL7075
Battery Type	CR2032
Battery Life	30,000+ hrs
Mount Footprint	SHIELD RMSC
Length x Width	1.62" X 0.98"
Weight (w/Battery)	0.71 oz



# OP3 MICRO MRDS



**OP3 MINI MICRO**  
Constant-on Automatic Brightness  
SHIELD RMSC Footprint / Red 3 MOA / OT-RDM16R

## OP3 MINI MICRO MRDS

- » High Clarity Coated Glass Lens Housed within a Precision Machined Matte Black Anodized 6061-T6 Aluminum Body
- » IPX7 Waterproof Rated
- » Lower 1/3 Co-witness with Most Standard Height Iron Sights
- » Integral Rear Backup Iron Sight Milled into Body
- » Protective Optic Cover Included
- » Out-of-the-box Compatible with SIG P365X/XL, GLOCK 43X/48 MOS, WALTHER PPS M2 RMSC, SPRINGFIELD ARMORY HELLCAT OSP, RUGER MAX-9, S&W PERFORMANCE CENTER M&P SHIELD M2.0, and Most Other Optics-Ready Pistol Platforms

	OT-RDM16R
Lens Diameter	0.85" X 0.59"
Reticle / Illumination	Red 3 MOA Dot
Illumination Mode	Automatic, Constant-on
Material	Anodized AL6061
Battery Type	CR2032
Battery Life	30,000+ hrs
Mount Footprint	SHIELD RMSC
Length x Width	1.60" X 0.95"
Weight (w/Battery)	0.70 oz



**OP3 MICRO**  
Manual Brightness

DOCTER® Footprint / Red 4 MOA / OP-RDM20R  
DOCTER® Footprint / Green 4 MOA / OP-RDM20G  
RMR® Footprint / Red 4 MOA / OP-RMR20R



**OP3 MICRO SL**  
Side Loading Battery / Manual Brightness

DOCTER® Footprint / Red 4 MOA / OP-RDM20CT



**OP3 MICRO SLS**

Side Loading Battery / Manual & Auto Sensing Brightness

DOCTER® Footprint / Red 4 MOA / OP-RDM20CTS  
RMR® Footprint / Red 4 MOA / OP-RMR20CTS

## OP3 MICRO MRDS

- » IPX7 Waterproof Rated
- » Coated Wide 23mm FOV Glass Lens
- » Co-witnesses with Most Suppressor Height Iron Sights
- » Tertiary Aiming Point Laser Engraved on Rear Face of Housing

	OP-RDM20R	OP-RDM20G	OP-RMR20R	OP-RDM20CT	OP-RDM20CTS	OP-RMR20CTS
Lens Diameter	0.89" X 0.68"	0.89" X 0.68"	0.89" X 0.68"	0.89" X 0.68"	0.89" X 0.68"	0.89" X 0.68"
Reticle / Illumination	Red 4 MOA Dot	Green 4 MOA Dot	Red 4 MOA Dot	Red 4 MOA Dot	Red 4 MOA Dot	Red 4 MOA Dot
Illumination Mode	Manual	Manual	Manual	Manual	Manual / Automatic	Manual / Automatic
Adjustment	1 MOA Per Click	1 MOA Per Click	1 MOA Per Click	1 MOA Per Click	1 MOA Per Click	1 MOA Per Click
Material	Anodized AL6061	Anodized AL6061	Anodized AL6061	Anodized AL6061	Anodized AL6061	Anodized AL6061
Battery Type	CR2032 3V	CR2032 3V	CR2032 3V	CR1632 3V	CR1632 3V	CR1632 3V
Battery Life	55,000+ hrs	20,000+ hrs	55,000+ hrs	15,000+ hrs	15,000+ hrs	15,000+ hrs
Mount Footprint	For Docter®	Docter®	RMR®	Docter®	Docter®	RMR®
Length x Width	1.90" X 1.14"	1.90" X 1.14"	1.78" X 1.14"	1.90" X 1.14"	1.90" X 1.14"	1.78" X 1.14"
Weight (w/Battery)	1.2 oz	1.2 oz	1.1 oz	1.2 oz	1.2 oz	1.2 oz

# ITA DOT SIGHTS & MAGNIFIER



### 3X QD FLIP-TO-SIDE MAGNIFIER


- » Windage/Elevation Adjustability for Optimum View Centering
- » 42mm Center Height for Most Common Dot Sight Combination
- » Perfect Match with: SCP-DS3840W, SCP-DS3039W, SCP-DS3840TDQ
- » Match with 0.60" Riser: SCP-RD40RGW-A
- » Match with 0.75" Riser: SCP-RG40SDQ, SCP-RG40CDQ
- » US PAT. 8397421, US PAT. D672839, EU PAT. EP1984576-0001

Integral QD Mount / SCP-MF3WEQS


### 6.0" ITA DOT SIGHT

- » Built on TRUE STRENGTH® Platform
- » Unlimited Eye Relief and Intuitive, Quick-to-Acquire Red/Green T-dot Reticle for Swift Execution of T-Zone and Center Mass Hits
- » Premium Zero Lockable and Zero Resettable Target Turrets with Most Consistent, Precise and Reliable 1/2 MOA per Click Adjustment and Zero Hold Capability
- » 42mm Center Height for 1/3 Co-witness of Front and Rear Iron Sights
- » US PAT. 8397421

RG T-Dot / Bidirectional QD Mount / SCP-TDQDQ



» Offset Riser Applications

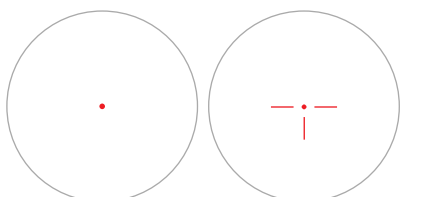


### 4.2" ITA DOT SIGHTS

- » US PAT. 8397421
- RG 4 MOA Single Dot / Adjustable Riser / SCP-DS3840W
- RG T-Dot / Adjustable Riser / SCP-DS3840TDQ




» Offset Riser Applications

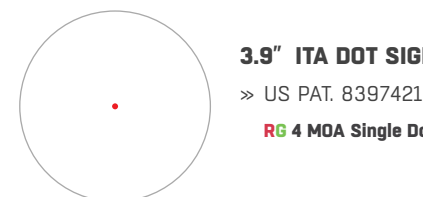


### 3.9" ITA DOT SIGHT

- » US PAT. 8397421
- RG 4 MOA Single Dot / Adjustable Riser / SCP-DS3039W

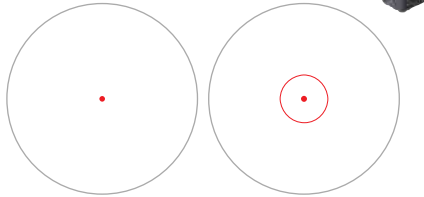

### 3.8" ITA DOT SIGHTS

- » US PAT. 8397421
- RG 4 MOA Single Dot / Integral Mount / SCP-RD40RGW-A
- RG 4 MOA Single Dot / Integral Qd Mount / SCP-RG40SDQ
- RG Circle Dot / Integral QD Mount / SCP-RG40CDQ

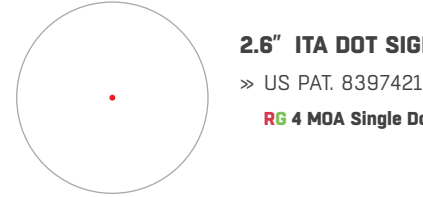

### 2.6" ITA DOT SIGHT

- » US PAT. 8397421
- RG 4 MOA Single Dot / Integral QD Mount / SCP-DS3026W



	SCP-MF3WEQS	SCP-TDQDQ	SCP-DS3840W	SCP-DS3840TDQ	SCP-DS3039W	SCP-RD40RGW-A	SCP-RG40SDQ	SCP-RG40CDQ	SCP-DS3026W
Reticle / Illumination	N/A	T-DOT / RG	Single Dot / RG	T-DOT / RG	Single Dot / RG	Single Dot / RG	Single Dot / RG	Circle Dot / RG	Single Dot / RG
Magnification	3X	1X	1X	1X	1X	1X	1X	1X	1X
Main Tube Diameter	44 mm	38 mm	38 mm	38 mm	30 mm	38 mm	38 mm	38 mm	30 mm
Objective Diameter	25 mm	39 mm	32 mm	32 mm	26 mm	30 mm	30 mm	30 mm	21 mm
FOV @ 100 Yards	45'	85'	103'	103'	75'	95'	95'	95'	95'
Eye Relief	2"	Unlimited	Unlimited	Unlimited	Unlimited	Unlimited	Unlimited	Unlimited	Unlimited
Exit Pupil	8.7 mm	Unlimited	Unlimited	Unlimited	Unlimited	Unlimited	Unlimited	Unlimited	Unlimited
Click Value	N/A	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"
Center Height	42 mm	42 mm	32 mm (42 mm w/riser)	32mm (42mm w/riser)	30 mm (40 mm w/riser)	25.5 mm	25.5 mm	25.5 mm	25 mm
Length	4"	6"	4.2"	4.2"	3.9"	3.8"	3.8"	3.8"	2.6"
Weight	11.82 oz	13.1 oz	8.7 oz	8.7 oz	8.3 oz	9.4 oz	8.4 oz	8.4 oz	4.9 oz
Battery Type	N/A	CR1620 3V	CR1620 3V	CR1620 3V	CR1620 3V	CR2032 3V	CR2032 3V	CR2032 3V	CR1620 3V