



 **OPTICS**
UTG®


JUMP TO A SERIES

| | |
|--------------------------------------|---------|
| FLAGSHIP SERIES..... | Page 26 |
| ACCUSHOT® SERIES..... | Page 30 |
| BUGBUSTER® SERIES..... | Page 38 |
| TRUE HUNTER® SERIES..... | Page 40 |
| AIR RIFLE SCOPE SERIES..... | Page 42 |
| CROSSBOW & HANDGUN SCOPE SERIES..... | page 44 |

(Third party trademarks may be used in this catalog for the convenience of customers to indicate the fit or compatibility of the applicable Leapers items.)


OVER THE TOP ADVANCEMENT

We at Leapers, Inc. have spent years honing our experience and understanding in scope design and manufacturing, leading us down a path of tremendous innovation. Our in-house engineers and research and development technicians have pressed onward in revamping current product lines and bringing new optical designs. Through advanced ZEMAX optical design software, our scopes' internals minimize any aberrations from within and when customers purchase our scopes, they are purchasing precision made products that have undergone thorough systems analysis resulting in sharp image quality, reliable zero hold, seamless magnification adjustment, and crisp and tactile windage and elevation adjustment.

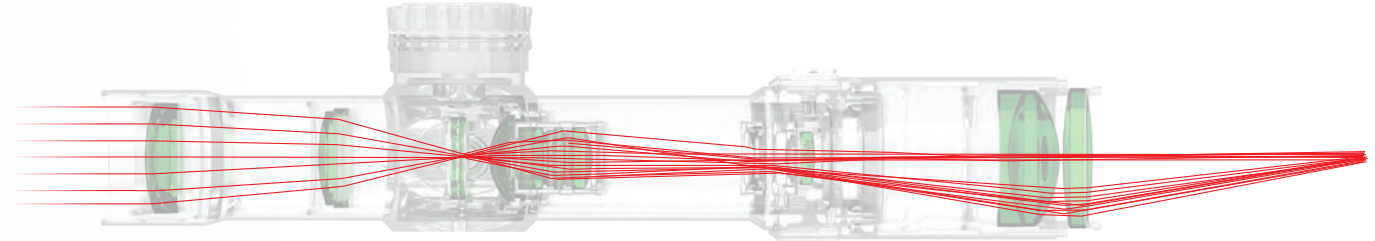

CERTIFIED AND GUARANTEED TO PERFORM

Optical Bench Collimator testing is used to verify focal length, identify optical aberrations, confirm image resolution, and more. Such testing in tandem with quality and tolerance control measures on parts individually, certifies that the completely assembly of external and internal parts to include the glass, assembly hardware, etc. are reliably functioning to our high standards. Such thorough testing and system verification confirms that quality standards have been met, but more importantly validates the performance our customers have come to expect when purchasing our optics. Our Best Never Rest Lifetime Warranty attached to all of our scopes is our seal of commitment to providing a complete and total solution for shooters of all disciplines.

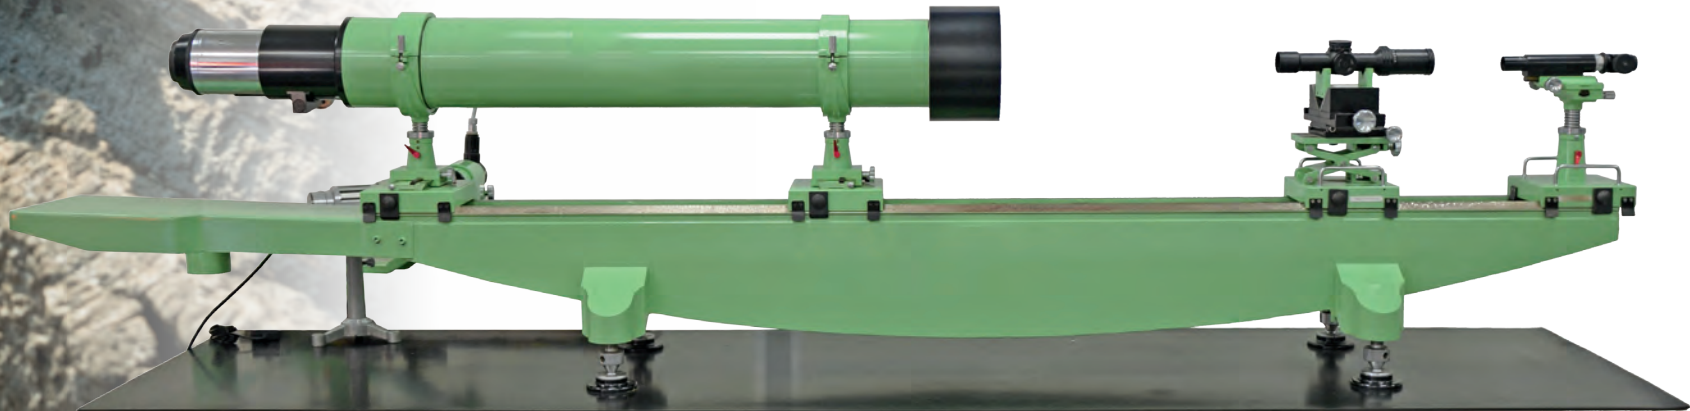

29 YEARS OF

EXPERIENCE, DEVELOPMENT & TECHNOLOGY

TRUE STRENGTH® PLATFORM

As the name suggests, we aim to achieve the highest dependability starting at the heart of our scopes' structure. The research and development of this innovative structure was initiated in 2001. A year later the first TS platform scope was put into mass production under the ACCUSHOT® name. With our continuous testing, verification, and multiple rounds of improvement, we started promoting and selling ACCUSHOT® optics on a global scale in 2005. Features included as part of the TS Platform are a one-piece aluminum main body, meticulously placed reinforcements at key structural points and moving parts, and a sealed and nitrogen purged internal cavity to achieve rainproof, fogproof, and shockproof performance.



FLAGSHIP FFP. AT ITS CORE.

Improve upon yesteryears and take what is to become to new heights. The core of UTG PRO and UTG FLAGSHIP FFP optics. What has been built and learned upon after years of experience in manufacturing and design is our Flagship FFP optics. They are the culminating result of bringing in optical specialists to set the highest standard in light transmission, resolution, minimized optical aberrations, and optimized internal parts harmony. Machining completed on Citizen& Miyano machines under strict procedural guidelines set to maintain a higher degree of parts tolerance. Build materials improved through use of Japanese and German glass. Structural reliability validated after enduring a battery of live fire, strike, and adverse temperature testing. Bearing the FLAGSHIP FFP name means having precision craftsmanship, resilience to environmental elements and adverse temperatures, reliability to withstand brutally high recoiling calibers, intuitive functionality, and the finest of fine-tuned clarity.

SMART SPHERICAL STRUCTURE (SSS)

This windage and elevation adjustment system reliably controls and secures the erector tube via a ball and socket structural relationship and allows for a much wider windage and elevation adjustment range while still maintaining reliability.



A RECOIL PROOF SYSTEM

Component leaf springs are made from a specially heat-treated beryllium bronze alloy to maintain reliable and consistent long term tension that is backed and reinforced by a rugged coiled erector return spring.



ADVERSE TEMPERATURE & HUMIDITY TESTING

To test performance and reliability in adverse temperatures and humidity, an advanced and programmable climate chamber is used to perform stringent testing. Our scopes undergo a week long endurance test where the temperature traverses from -40° to 70° Celsius. Variable Humidity testing is also conducted and introduced as temperatures rise. Both tests are used to verify thresholds, electronic functions, seal integrity, the stability of internal structures and components, and the function of moving parts.



WATERPROOF TESTING

Scopes are fully submerged in over 1 meter of water held within an acrylic water tank for over 30 minutes. Observations are then made and data is collected on the integrity of the scope before, during, and after the test. After being pulled from submersion, scopes are checked for proper function to include: windage, elevation, magnification, parallax, and diopter adjustment, viewfinder clarity, reticle illumination, and zero hold.



INTEGRATED MANUFACTURING

FROM CONCEPT TO DELIVERY

Under our own disciplined management, Leapers UTG® is one of the few companies in the industry with a full range of vertically integrated operations to support product development, manufacturing, distribution, and service. Customers can always count on our optics to offer the best quality, value, and reliability.


IN-HOUSE ENGINEERING



STRAY LIGHT ANALYSIS



CAD MODELING



FDM RAPID PROTOTYPING FOR FUNCTION VERIFICATION

MANUFACTURING



STATE-OF-THE-ART CNC MACHINES



STRINGENT LENS CERTIFICATION



CLEAN ROOM ENTRY

QUALITY CONTROL



DUST FREE ASSEMBLY



DISCIPLINED ASSEMBLY PROCEDURE



FINAL ASSEMBLY QC INSPECTION

2021 AT A GLANCE


THE DIFFERENCE 29 YEARS MAKE WHEN THE BEST NEVER REST



LARGER FOV



HIGHER RESOLUTION



LOWER DISTORTION



HIGHER DEPTH OF FIELD



OPTIMIZED LOW LIGHT CLARITY



PRECISION MACHINING




FIRST-CLASS LENS QUALITY



METICULOUS ASSEMBLY




IPX7 WATERPROOF

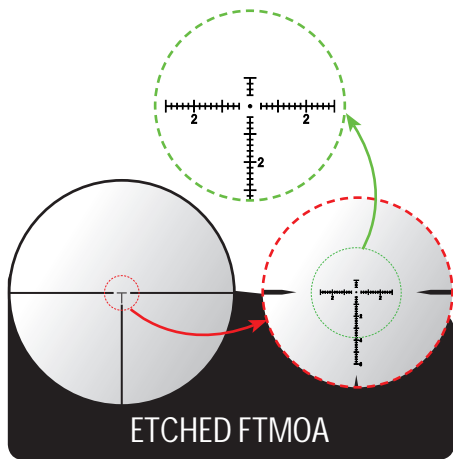

ETCHED FTMOA

The Etched FTMOA is an illuminating reticle that resides in the first focal plane and is designed for a 50/200 yard zero. The FTMOA features a 1 MOA center dot at the origin that is free-floating within an 8 MOA open space. Traveling down the reticle's vertical axis and down to its

center origin is a 10 MOA line for hold-under and below the origin, at 2 MOA increments, hash marks up to 60 MOA for holdover out to 800 yards using 55 grain .223 ammunition. Horizontally, the reticle has a total range of 60 MOA for target lead and wind drift. At 1x magnification, the reticle will appear as a quick-to-acquire 1 MOA illuminated T-Dot and is best utilized for close range target acquisitions, transitions, and engagements.

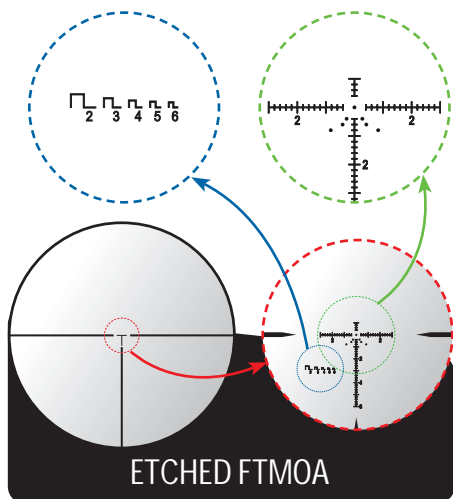


ETCHED FTMOA

The Etched FTMOA is an illuminating range estimating reticle that resides in the first focal plane and is designed for a 50/200 yard zero. The FTMOA features a 1 MOA center dot at the origin that is free-floating within an 8 MOA open space. Traveling down the reticle's vertical axis and down to its center origin is a 10 MOA line for hold-under and below the origin, at 2 MOA increments, hash marks up to


60 MOA for holdover out to 800 yards using 55 grain .223 ammunition. Horizontally, the reticle has a total range of 60 MOA for target lead and wind drift. At 1x magnification, the reticle will appear as a quick-to-acquire 1 MOA T-Dot and is best utilized for close range target acquisitions, transitions, and engagements.

In addition are two means of range estimation. One, is centered with the reticle's origin and provides quick ranging from 100 to 300 yards and is based on the average male shoulder width at said distances on max magnification. The other is off to the lower left of the reticle and provides even further range estimation from 200 to 600 yards using the "head and shoulders" width of an average male at said distances on max magnification.


RETICLE OPTIONS




ETCHED MIL-DOT



ETCHED TMOA



ETCHED UMOA




WIRE PRO 5-STEP

The Mil-dot reticle is the most widely used reticle in our rifle scopes, which provides range estimating capability. The crosshair has dots and dashes spread equally along the X and Y axis. The distance between two adjacent marks subtends to 1 milli-radian. The etched-glass reticle offers our discerning users the sharpest Mil-dot reticle for precise range estimation.


The TMOA reticle resides in the first focal plane and features a centered crosshair with a 4 MOA span vertically and horizontally. Just below the crosshair and traveling down the vertical axis at 2 MOA increments are hash marks up to 40 MOA for holdover and above the reticle, 10 MOA for hold under. For target lead and wind drift, hash marks to the left and right of the crosshair traverse away from the center with the same 2 MOA increments up to 30 MOA.

The UMOA reticle features hash marks at minute of angle increments for precise range estimation and bullet drop and wind drift compensation. This reticle is the best choice for long-range precision shooters who want clear adjustments and to rapidly calculate holds. The reticle's center crosshair can be illuminated to assist aiming under different light conditions.


The Pro 5-step reticle is designed for crossbows. The reticle consists of five horizontal lines and a vertical line, with a thin center crosshair. The horizontal lines are for aiming at 10, 20, 30, 40, and 50 yard distances, calibrated for 300fps crossbows.




WIRE MIL-DOT



ETCHED 130 HUNTER



BG4



WIRE PDC

The Mil-dot reticle is the most widely used reticle in our rifle scopes, which provides range estimating capability. The crosshair has multiple dots spread equally along the X and Y axis. The distance between two adjacent marks subtends to 1 milli-radian. The traditional wire reticle is robust and holds up against strong recoil and offers a clear aiming reference without compromise.

The 130 Hunter reticle features a "through the viewfinder" bubble leveler located at the 6 o'clock and ballistic drop compensation and range estimating markers out to 130 yards. Markers found down the central spine of the reticle illuminate and are calibrated to match crossbow ballistics from 20 yards up to 130 yards using 10 yard increments. The center of the reticle marker is calibrated for a 50 yard target distance for general ease of use.

The BG4 Reticle is designed to be fast and intuitive to use and features ballistic drop compensation and rangefinder markings out to 600 yards. The ballistic data is based on common 5.56/.223 loadings in modern sporting rifles. The three thick posts draw the eye to the center for rapid acquisition at close range, while the drop compensation allows for rapid engagement of targets throughout the platform's effective range.

The Projectile Drop Compensation (PDC) reticle uses different bars and circles arranged at designated heights to aid in range estimation and serve as aiming points set at predetermined distances. This enables easy and rapid target engagement at multiple ranges.

OPTIC FEATURES

TS

TRUE STRENGTH®(TS) PLATFORM

TS symbolizes the elite quality of Leapers optics. It represents the most robust optical structure designed and made by Leapers UTG®. TS guarantees precise and responsive adjustments, tough recoil resistance, fogproof, rainproof, and shockproof properties. Also refer to P.015.

RGB

RED/GREEN/BLACK ILLUMINATION

Selectable red/green illumination with standard black non-illuminated reticle.

IE

IE ILLUMINATION

36 color illumination enhancement.



34MM 1-PIECE MAIN TUBE

The scope main tube is machined from 1-piece Aircraft aluminum. Compared to other sectional tubes, a 1-piece integral main tube guarantees long term strength and performance integrity. A 34mm tube provides wider windage and elevation adjustment.



30MM 1-PIECE MAIN TUBE

The scope main tube is machined from 1-piece Aircraft aluminum. Compared to other sectional tubes, a 1-piece integral main tube guarantees long term strength and performance integrity.



1 INCH 1-PIECE MAIN TUBE

The scope main tube is machined from 1-piece aircraft aluminum. Compared to other sectional tubes, a 1-piece integral main tube guarantees performance integrity and accuracy. A 1 inch tube along with a well designed optical system can provide a bright and crisp image while being lightweight.



RINGS & LENS CAPS

Picatinny or .22 Dovetail rings and flip-open lens caps are included.



FLIP-OPEN LENS CAPS

No more traditional, clumsy lens covers. The flip-open design allows you to open and close the caps quickly and conveniently.



SUNSHADE INCLUDED

Prevent glare and stray light from directly hitting your objective lens by adding this sunshade. Minimizing the stray light by shading it helps your eyes take advantage of the light that comes from the target.



TACTEDGE® ANGLED INTEGRAL SUNSHADE

Angled objective tube with integral sunshade shields the objective lens from sunlight or other ambient light for better image contrast and clarity.



DOUBLE LOCK TURRETS

User friendly turrets for windage/elevation adjustment with a proprietary dual-screw zero locking design to guarantee zero retention.



TWIST LOCK MOUNTING BASE

Twist Lock for tool free quick installation and removal.



QD LEVER LOCK

Quick Detach Lever Lock for tool free quick installation and removal.

3yds

ADJUSTABLE OBJECTIVE FROM 3YDS UP

Signature feature of the BUG BUSTER® series especially loved by airgunners, allowing clear focus of close-range targets.



PRISMATIC REFRACTION

Sophisticated prism-based design allows for a compact optical system without sacrificing optical quality.



SWAT PARALLAX CONTROL

Side Wheel Adjustable Turret (SWAT) adjusts the parallax from close in distance to infinity. Designed for single revolution quick target distance adjustment to achieve a parallax-free image. The turret has engraved distance markings and are compatible with UTG® Big Wheels. Refer to P.047.



FRONT ADJUSTABLE OBJECTIVE

Front Adjustable Objective Ring adjusts parallax from close range to infinity.



ZERO L/R TURRETS

Zero Locking/Resetting Target Turrets are designed with a rotational locking ring. Unlocking the ring allows for precise windage and elevation adjustment. Loosening the turret hex screw will allow for zero resetting.



WINDAGE/ELEVATION LOCKABLE

Windage/Elevation adjustment can be locked for effective zero retention.



UNLIMITED EYE RELIEF

If you see the dot, you can hit your target regardless of eye relief distance.



EXTENDED EYE RELIEF

Eye relief tailored towards firearms which require optics replaced farther forward on the receiver.



IPX7 WATERPROOF

Able to withstand immersion in water up to 1 meter for up to 30 minutes.



PATENTED

Product or included accessories are patented.



IE® 36 COLOR ILLUMINATION

U.S. PAT. 84377079, EU PAT. EP2520894. Most innovative, low profile illumination control with special circuitry and housing design for uninterrupted illumination even under heavy recoil.



BROADBAND MULTI-COATING

With our special broadband multi-coating, light transmission through the lens is enhanced for the complete spectrum of the visible light band. The light transmission rate of the individual lens is over 95% to provide a bright and crisp image during both daylight and low light conditions.




LOCKING EYEPIECE DIOPTR

Set Once Locking Eye Piece Diopter


| | FLAGSHIP FFP | ACCUSHOT® SERIES | BUGBUSTER® SERIES |
|----------------------|--|--|--|
| |  |  |  |
| PAGE RANGE | P.026-029 | P.030-037 | P.038-039 |
| MODELS | 1-8x28 FFP FTMOA.....OPU001 1-8x28 FFP FTMOA.....OT-GF1828 | 3-12x44 UMOA.....OP3-GM3124UMOA 4-16x44 UMOA.....OP3-GM4164UMOA 3-12x44 Mil-dot.....SCP3-UM312AOIEW 4-16x44 Mil-dot.....SCP3-UM416AOIEW 1-8x28 G4.....SCP3-18IEBG4 1-8x28 Circle Dot.....SCP3-18IECDQ 2-16x44 Mil-dot.....SCP3-216AOIEW 2-16x44 UMOA.....SCP3-216UMOA 2-7x44 Mil-dot Long Eye Relief.....SCP3-274LAOIEW 4x32 T-dot Prism.....SCP-T4IETDQ 3-12x44 Mil-dot.....SCP3-U312AOIEW 4-16x44 Mil-dot.....SCP3-U416AOIEW 3-12x44 Mil-dot.....SCP3-3124EAOW | 3-12x32 Mil-dot.....SCP-M312AOWQ 3-12x32 Mil-dot.....SCP-M312AOD 3-9x32 Mil-dot.....SCP-M392AOIEWQ 3-9x32 Mil-dot.....SCP-M392AQLWQ |
| HIGHLIGHTS | Low Power Variable Optic (LPVO) ideal for ARs and other MSRs. First focal plane (FFP) optic featuring MOA reticle with edge to edge clarity and an IPX7 waterproof rating. | Premium optics featuring improvements in resolution through optimized internal light transmission pathway, crisp and tactile turret movement with exacting increments and consistent per click adjustment, and updated IPX7 waterproof rating. Additional features include a set-once locking eyepiece diopter and wider surface turret heads for ease of making adjustments with or without gloves. High magnification power up to 16X, 30mm 1-piece main tube, etched glass reticle, IE® full color illumination and advanced broadband multi-coated lenses providing the best image quality, wide field of view, precise zeroing and reliable zero holding. | Compact and lightweight mil-dot wire reticle scopes with 3 yards to infinity parallax adjustment range for majority of models. Illuminated and non-illuminated models available along with models reaching as high as 12X magnification. |
| APPLICATIONS | AR15& AR308 platform, Bullpups, MSRs, DMRs, SPRs | DMRs, MSRs, SPRs, Bolt Action Rifles, Extended Long Range Precision Bolt Action and Semi-automatic Rifles | AR Platform and Other MSRs, Bullpups, .22 Rifles, Bolt Action Rifles |
| SUGGESTED USES: | Multi-range Precision Shooting, 3-Gun Competition, Home and Personal Defense, Hunting, Recreational, Defense and Law Enforcement Agencies | Precision Target Shooting, Bench Rest Shooting, Medium to Long Range Precision Shooting, Hunting, Recreational | General Purpose, Home and Personal Defense, Hunting, Recreational, Plinking |
| PARALLAX ADJUSTMENT | Preset at 100 Yds | Side Wheel 10Yds to Infinity or Preset @ 100Yds | Front/Side AO 3Yds to Infinity |
| ILLUMINATION | RGB Side wheel | IE® 36-color with EZ-TAP® Control or No Illumination | IE® 36-color/RGB with EZ-TAP® Control/RGB Side Wheel/No Illumination |
| INCLUDED SCOPE RINGS | Not Included | MS Twist Lock Rings Included | MS Lever Lock QD Rings Included |

| TRUE HUNTER® SERIES | AIR RIFLE SCOPE SERIES | CROSSBOW & HANDGUN SCOPE SERIES |
|--|---|---|
|  |  |  |
| P.040-041 3-9x40 Mil-dot.....SCP-U394AOIEW 3-9x40 Mil-dot.....SCP-U394AOIED 4-16x40 Mil-dot.....SCP-U4164AOIEW 6-24x50 Mil-dot.....SCP-U6245AOIEW 3-9x40 Mil-dot.....SCP-U394FWT2 3-9x40 Mil-dot.....SCP-3940EW 4x32 Mil-dot.....SCP-U432FD | P.042-043 3-12x44 UMOA.....OP3-GM3124UMOA 4-16x44 UMOA.....OP3-GM4164UMOA 3-12x44 Mil-dot.....SCP3-UM312AOIEW 4-16x44 Mil-dot.....SCP3-UM416AOIEW 4-16x44 Mil-dot.....SCP3-U416AOIEW 3-12x44 Mil-dot.....SCP3-3124EAOW 3-12x32 Mil-dot.....SCP-M312AOWQ 3-12x32 Mil-dot.....SCP-M312AOD 3-9x32 Mil-dot.....SCP-M392AOIEWQ 3-9x32 Mil-dot.....SCP-M392AOLWQ 3-9x40 Mil-dot.....SCP-U394AOIED 4-16x40 Mil-dot.....SCP-U4164AOIEW | P.044-045 1.5-6x36 130 HT.....OP3-G1563CRWQ 4x32 PRO 5-STEP.....SCP-M4CR5WQ 2-7x32 PDC.....SCP-27PRGW |
| <p>For IE scopes, they feature 1-inch full-size main tube, front adjustable objective from 5 yards to infinity, convenient zero locking /resetting W/E turrets, IE® full color illuminated Mil-dot reticle, variable power, broadband multi- lens coating, and adjustable eyepiece. All fully tested and certified by the strictest industry standards.</p> <p>For classic scopes, they feature TF2+ windage and elevation turrets, simply pull up to make your adjustments and push down to lock them in. A high value, budget-minded, and straight-forward series of mil-dot wire reticle optics with fixed power and variable power magnification models available.</p> | <p>Excellent choice for air rifle applications.</p> | <p>Based off the TS Platform, our amazingly unique crossbow/ handgun optics are specifically equipped with a parallax preset ideally for the effective range of most crossbows and handguns. They are featured with either Bubble leveler TMOA reticle and PRO 5-step reticle for crossbow scopes or Projectile Drop Compensation (PDC) reticle for handgun scopes for quick aiming at different yardage.</p> |
| Extended Long Range Precision Bolt Action and Semi-automatic Rifles Centerfire and Rimfire Bolt Action Rifles, Air Rifles | Air Rifles | Crossbows & Pistols |
| Precision Target Shooting, Bench Rest Shooting, Long Range Precision Shooting, Recreational | Air Rifles, etc. | Hunting, Recreational |
| Front AO 5Yds to Infinity, 10Yds to Infinity, or Preset at 35Yds or 50Yds | Please Refer to Related Subcategories | Preset at 35Yds, 50Yds or 10Yds to Infinity |
| IE® 36-color with EZ-TAP® Control or No Illumination | Please Refer to Related Subcategories | RGB/ EZ-TAP® Side Wheel |
| MS/Accushot Twist Lock Rings or Dovetail Rings Included for Selected Models | Please Refer to Related Subcategories | MS/ACCUSHOT® Twist Lever Lock /Twist Lock QD Rings Included |


OPTICAL PERFORMANCE

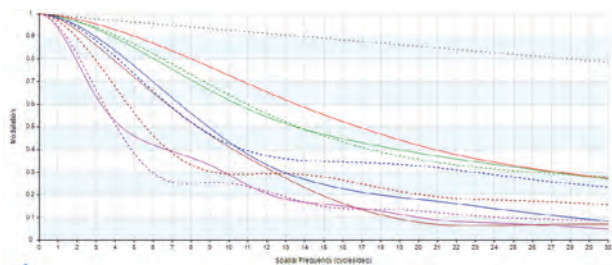


RESOLUTION/CONTRAST/MTF ANALYZING & OPTIMIZATION



GRID IMAGE SIMULATION

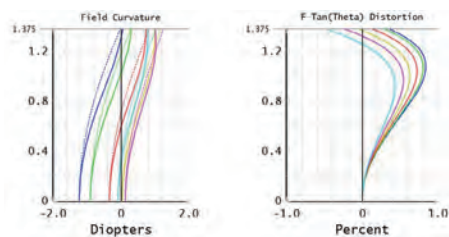

DISTORTION, FIELD CURVATURE & ASTIGMATISM ANALYZING & OPTIMIZING

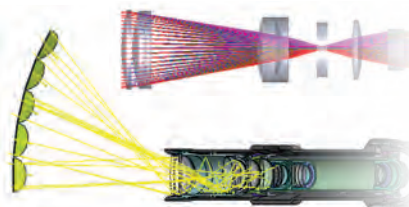

OPTICAL DESIGN, STRAY LIGHT ANALYSIS



EDGE TO EDGE CLARITY



LOW DISTORTION




LARGER FOV

FIRST-CLASS LENSES & COATINGS




FLAGSHIP FFP


MECHANICAL DESIGN

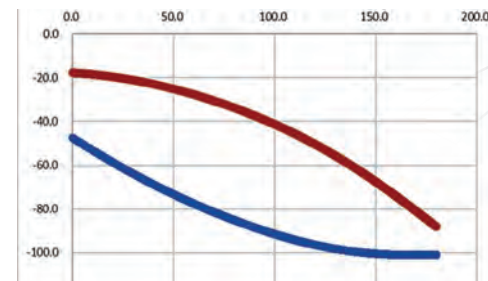


HIGH-PRECISION ZOOM CAM CURVE FITTING



REINFORCED TURRET LOCK & ADJUSTMENT MECHANICS

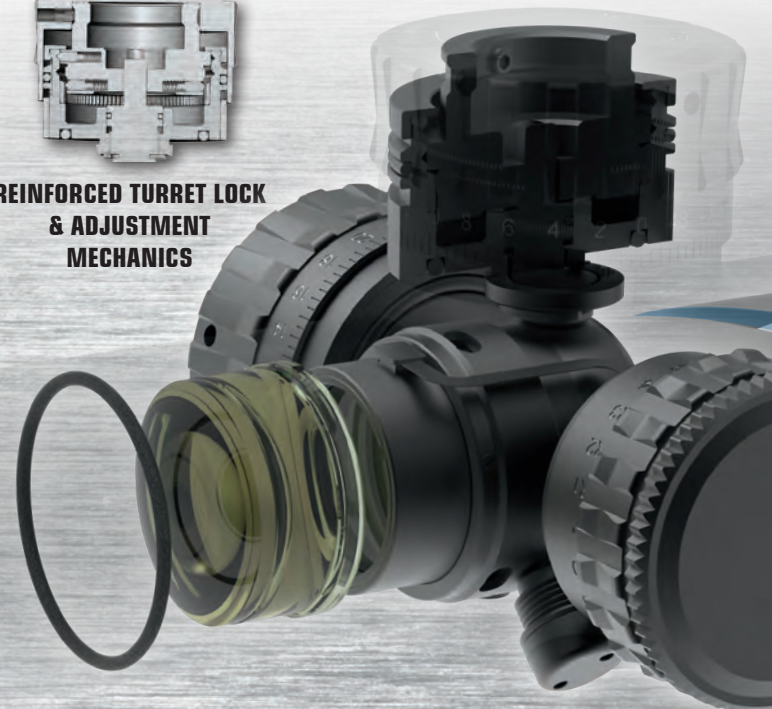

DEVELOPMENT

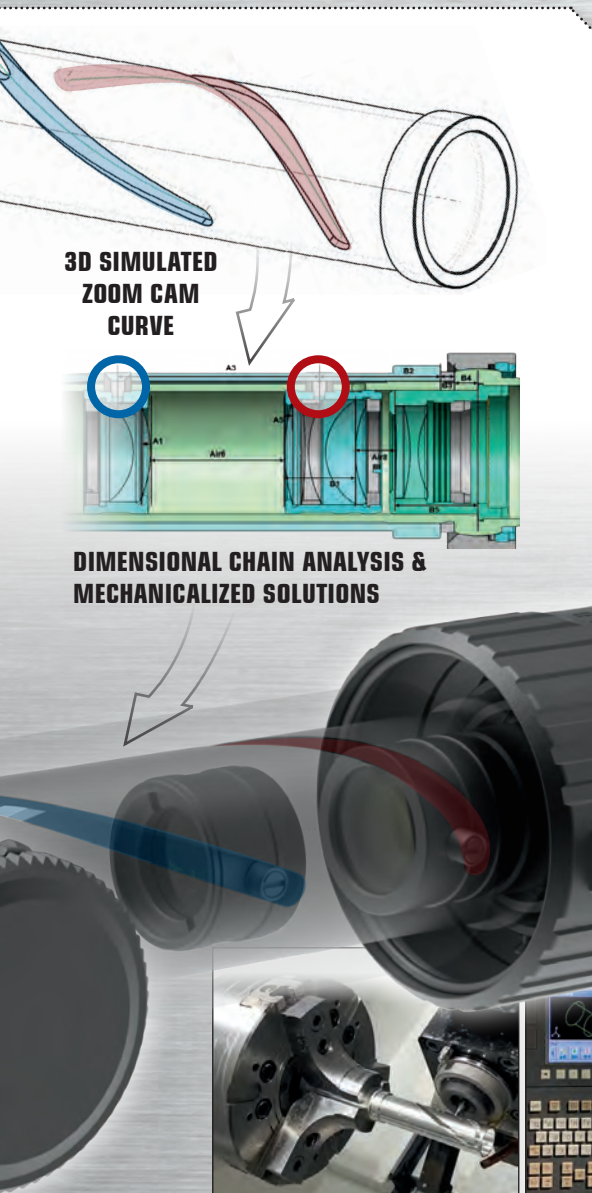


3D SIMULATED
ZOOM CAM
CURVE

DIMENSIONAL CHAIN ANALYSIS &
MECHANICALIZED SOLUTIONS




ZOOM CAM CURVE PRECISION MANUFACTURED

TESTING & CERTIFICATION

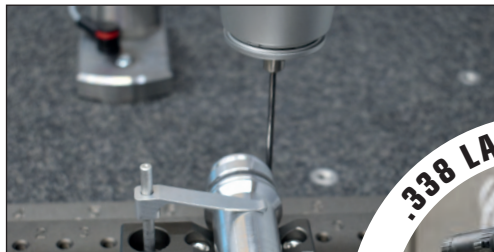

PRECISION
MEASUREMENT

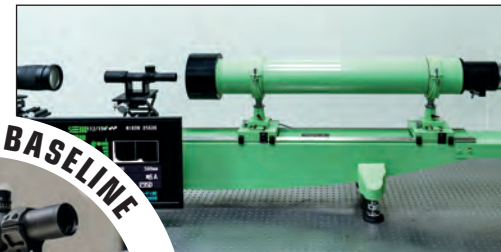

RESOLUTION/MTF
MEASUREMENT



CLIMATE CHAMBER TESTING



STRIKE MACHINE TESTING

MANUFACTURING & ASSEMBLY



9-AXIS CNC MACHINING



CONTROLLED LAB ASSEMBLY



UTG PRO® FLAGSHIP FFP OPTIC

Please refer to **P.023** for details.

RGB RED/GREEN/BLACK RETICLE

BROADBAND MULTI-COATING

34MM 1-PIECE MAIN TUBE

LENS CAPS

ZERO L/R TURRETS

IPX7 WATERPROOF

MADE IN USA

PARTS INCLUDED



Lens Caps



Installation Tool



Extended Throw Lever




Battery



MADE IN MICHIGAN

The flagship of an entirely new line of optics. First and foremost, Japanese and German glass, multi-coated for pristine clarity and optimized light transmission, are used exclusively in Flagship FFP optics. Along with reinforced and precision machined and finished components, such as a CNC machined aluminum erector tube, the on-point craftsmanship of this flagship FFP optic was of paramount importance. The inherent reliability that comes with such manufacturing principles and design allows our optics to withstand against some of the harshest recoil reports and is reinforced with an IPX7 waterproofed sealed system, protecting the optics from adverse environmental factors. Your next choice is here.

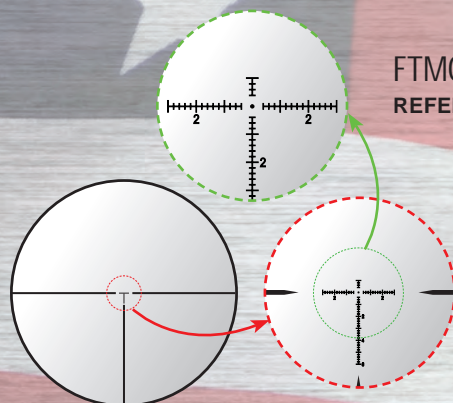

FTMOA BDC & RANGE ESTIMATING RETICLE
REFER TO P.023 FOR DETAILS

Serrated, Intuitive
Adjustment Windage &
Elevation Turrets

High Contrast, Multi-
coated Japanese
and German Glass

Anodized Matte
Black Finish. 6061-T6
Aluminum Main Body

Improved Circuitry Prevents
Intermittent Illumination
and Features Lower Power
Consumption

Adjustable
Eyepiece
Diopter

Extended Throw
Lever Included

Red or Green Reticle Illumination



US PAT. 10724829

NEW
FFP
ETCHED GLASS FTMOA
RETICLE
1-8X28

34MM OPU001

UTG PRO® 1-8X28 34mm FFP LPVO features crystal clear edge to edge clarity, world class German and Japanese Glass, and the FTMOA etched glass reticle. A BDC reticle that is quick to acquire at 1X magnification and range estimating capable at distance.

| | |
|------------------------|-------------------|
| Model # | OPU001 |
| Magnification | 1X~8X |
| Tube Diameter | 34 mm |
| Objective Diameter | 28 mm |
| Field of View | 22°~2.75° |
| Eye Relief | 3.7" |
| Exit Pupil | 10mm ~ 3.5 mm |
| Click Value @100 Yards | 1/2 MOA |
| Length | 10.87" |
| Weight | 24.9 oz |
| Parallax Setting | 100 Yds |
| Batteries | CR2032 3V |
| Battery Life/Red | 52hrs ~ 10,000hrs |
| Battery Life/Green | 80hrs ~ 10,000hrs |



UTG® FLAGSHIP FFP OPTIC

Please refer to **P.023** for details.

RGB RED/GREEN/BLACK RETICLE

BROADBAND MULTI-COATING

34mm 1-PIECE MAIN TUBE

LENS CAPS

ZERO I/R TURRETS

IPX7 WATERPROOF

MADE IN TAIWAN

PARTS INCLUDED



Lens Caps




Installation Tool



Extended Throw Lever



Battery

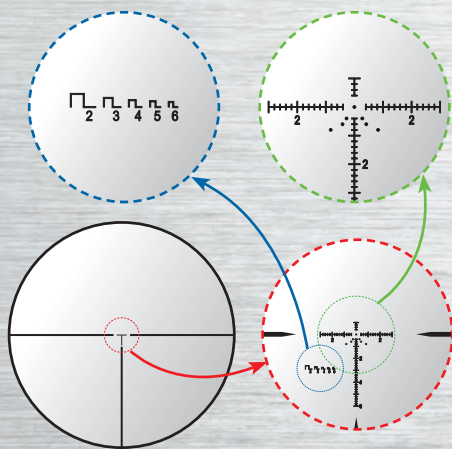

FTMOA BDC & RANGE ESTIMATING RETICLE
REFER TO P.023 FOR DETAILS



High Contrast, Multi-coated Japanese and German Glass

Anodized Matte Black Finish. 6061-T6 Aluminum Main Body

Improved Circuitry Prevents Intermittent Illumination and Features Lower Power Consumption

Serrated, Intuitive Adjustment Windage & Elevation Turrets

Adjustable Eyepiece Diopter

Extended Throw Lever Included

Red or Green Reticle Illumination

NEW
FFP
ETCHED GLASS FTMOA
RETICLE
1-8X28

34MM OT-GF1828

1-8X28 34mm FFP LPVO features crystal clear edge to edge clarity, world class German and Japanese Glass, and the FTMOA etched glass reticle. A BDC reticle that is quick to acquire at 1X magnification and range estimating capable at distance.

| | |
|--------------------------|-------------------|
| Model # | OT-GF1828 |
| Magnification | 1X~8X |
| Tube Diameter | 34 mm |
| Objective Diameter | 28 mm |
| Field of View @100 Yards | 22°~2.75° |
| Eye Relief | 3.7" |
| Exit Pupil | 10mm ~ 3.5 mm |
| Click Value @100 Yards | 1/2 MOA |
| Length | 10.87" |
| Weight | 24.9 oz |
| Parallax Setting | 100 Yds |
| Batteries | CR2032 3V |
| Battery Life/Red | 52hrs ~ 10,000hrs |
| Battery Life/Green | 80hrs ~ 10,000hrs |

OPTICS

UTG® FLAGSHIP FFP OPTIC




Please refer to **P.023** for details.

TS TRUE STRENGTH® PLATFORM

- IE 36 COLOR ILLUMINATION
- BROADBAND MULTI-COATING
- 30MM 1-PIECE MAIN TUBE
- RINGS & LENS CAPS
- ZERO I/R TURRETS
- SUNSHADE INCLUDED
- SIDE PARALLAX CONTROL
- IPX7 WATERPROOF


PARTS INCLUDED



COMPATIBLE ITEMS



FOR OP3 SERIES



Improved Resolution through Optimization of Internal Light Transmission Pathway and Lens Quality



Crisp and Tactile Turret Movement with Consistent Per Click Adjustment




IPX7 Waterproof Rated



Set Once Locking Eye Piece Diopter



IE®
**ETCHED
GLASS
UMOA
RETICLE**




10 YDS TO INFINITY

3-12X44/4-16X44

30MM / OP3-GM3124UMOA / OP3-GM4164UMOA

ACCUSHOT® OP3 30mm 3-12X44 / 4-16X44
UMOA Reticle Scope

IE®
**WIRE
MIL-DOT
RETICLE**



10 YDS TO INFINITY

3-12X44/4-16X44

30MM / SCP3-UM3124AOIEW / SCP3-UM4164AOIEW

ACCUSHOT® 30mm 3-12x44 / 4-16x44 Compact
Mil-dot Reticle Scope

| Model # | OP3-GM3124UMOA | OP3-GM4164UMOA | SCP3-UM3124AOIEW | SCP3-UM4164AOIEW |
|--------------------------|--------------------|--------------------|--------------------|--------------------|
| Magnification | 3X~12X | 4X~16X | 3x~12x | 4x~16x |
| Tube Diameter | 30 mm | 30 mm | 30mm | 30mm |
| Objective Diameter | 44 mm | 44 mm | 44mm | 44mm |
| Field of View @100 Yards | 32' ~ 10' | 26.2' ~ 8' | 32.0' ~ 10.0' | 26.2' ~ 7.85' |
| Eye Relief | 4" ~ 3.54" | 3.7" ~ 3.23" | 3.4" ~ 3.0" | 3.4" ~ 3.0" |
| Exit Pupil | 14.7mm ~ 4.5 mm | 11mm ~ 3 mm | 13.0 ~ 3.9mm | 11 ~ 2.7mm |
| Click Value @100 Yards | 1/4 MOA | 1/4 MOA | 1/4" | 1/4" |
| Length | 10.1" | 10.7" | 11.1" | 11.2" |
| Weight | 20.7 oz | 21.4 oz | 23.2oz | 21.8oz |
| Parallax Setting | 10 Yds to infinity | 10 Yds to infinity | 10Yds - Infinity | 10Yds to Infinity |
| Scope Ring SKU | RG2W3154 | RG2W3154 | RG2W3154 | RG2W3154 |
| Scope Ring Specification | 30mm, Med. Profile | 30mm, Med. Profile | 30mm, Med. Profile | 30mm, Med. Profile |
| Batteries | CR2032 3V | CR2032 3V | CR2032 3V | CR2032 3V |



ACCUSHOT® OPTICS

Exceptionally Versatile

Innovatively designed and ruggedly built CQB/MRC (Multi-Range Combat & Competition) scopes with a generous eye relief and amazing optical clarity for avid hunters and 3-gun competitors.

Please refer to **P.023** for details.

TS TRUE STRENGTH® PLATFORM



IE 36 COLOR ILLUMINATION



BROADBAND MULTI-COATING



30MM 1-PIECE MAIN TUBE



RINGS & LENS CAPS



ZERO L/R TURRETS




PARTS INCLUDED



Lens Caps



Installation Tool



Scope Rings




Battery

8X ZOOM IN A COMPACT PACKAGE




**ETCHED GLASS
BG4
RETICLE**





PARALLAX PRESET AT 100 YDS
1-8X28

30MM SCP3-18IEBG4

ACCUSHOT® 30mm 1-8x28 MRC BG4 Reticle Scope

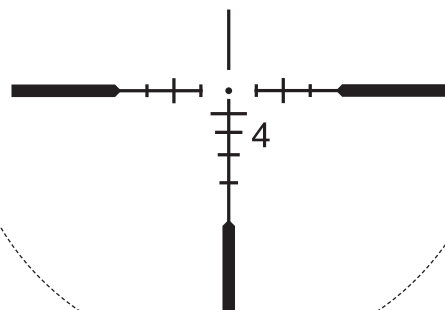


**BG4
RETICLE**

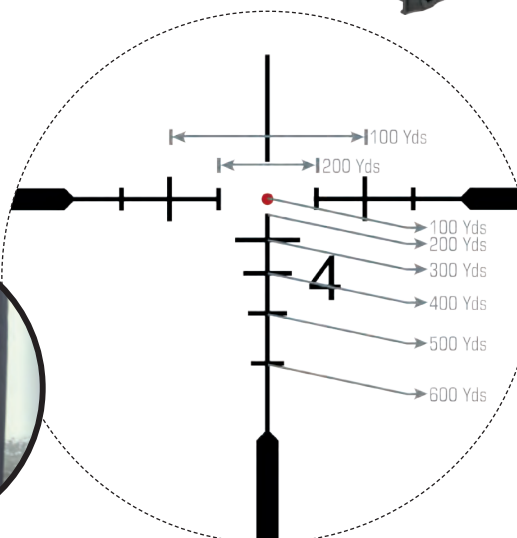

THE BG4 Reticle is designed to be fast and intuitive to use and features ballistic drop compensation and rangefinder markings out to 600 yards. The ballistic data is based on common 5.56/.223 loadings in modern sporting rifles. The three thick posts draw the eye to the center for rapid acquisition at close range, while the drop compensation allows for rapid engagement of targets throughout the platform's effective range.



IE®
ETCHED GLASS
CIRCLE-DOT
RETICLE




PARALLAX PRESET AT 100 YDS

1-8X28

30MM SCP3-18IECDQ

ACCUSHOT® 30mm 1-8x28 MRC
(Multi-range Combat / Competition)
Circle Dot Reticle Scope

IE®
ETCHED GLASS
MIL-DOT
RETICLE




10 YDS TO INFINITY

2-16X44

30MM SCP3-216A0IEW

ACCUSHOT® 30mm 2-16x44 MRC
(Multi-range Combat / Competition)
Mil-dot Reticle Scope

IE®
ETCHED GLASS
UMOA
RETICLE



10 YDS TO INFINITY

2-16X44

30MM SCP3-216UMOA

ACCUSHOT® 30mm 2-16x44 MRC
(Multi-range Combat / Competition)
UMOA Reticle Scope

| Model # | SCP3-18IEBG4 | SCP3-18IECDQ | SCP3-216A0IEW | SCP3-216UMOA |
|--------------------------|--------------------|--------------------|--------------------|--------------------|
| Magnification | 1x~8x | 1x~8x | 2x~16x | 2x~16x |
| Tube Diameter | 30mm | 30mm | 30mm | 30mm |
| Objective Diameter | 28mm | 28mm | 44mm | 44mm |
| Field of View @100 Yards | 99.5 ~ 13' | 99.5' ~ 13' | 44.5' ~ 6.3' | 44.5' ~ 6.3' |
| Eye Relief | 5 ~ 3.35" | 5 ~ 3.35" | 4.1 ~ 3.5" | 4.1 ~ 3.5" |
| Exit Pupil | 26.5 ~ 3.4mm | 26.5 ~ 3.4mm | 22 ~ 2.7mm | 22 ~ 2.7mm |
| Click Value @100 Yards | 1/2" | 1/2" | 1/4" | 1/4" |
| Length | 10.25" | 10.25" | 12.37" | 12.37" |
| Weight | 18oz | 18oz | 22.6oz | 22.6oz |
| Parallax Setting | 100 Yds | 100Yds | 10Yds - Infinity | 10Yds - Infinity |
| Scope Ring SKU | AIR32234 | RQ2W3154 | RQ2W3154 | RQ2W3154 |
| Scope Ring Specification | 30mm, High Profile | 30mm, Med. Profile | 30mm, Med. Profile | 30mm, Med. Profile |
| Batteries | CR2032 3V | CR2032 3V | CR2032 3V | CR2032 3V |



ACCUSHOT® OPTICS

Please refer to **P.023** for details.

TS TRUE STRENGTH® PLATFORM

IE 36 COLOR ILLUMINATION

BROADBAND MULTI-COATING

30MM 1-PIECE MAIN TUBE

RINGS & LENS CAPS

ZERO L/R TURRETS

ANGLED INTEGRAL SUNSHADE

SIDE PARALLAX CONTROL

PARTS INCLUDED



Lens Caps



Installation Tool



Scope Rings



Battery

COMPATIBLE ITEMS



Eye Shade



Side Wheel Add-on (P.047)

11"-9.5"
EXTENDED EYE RELIEF

Broadband Multi-coating for Optimal Light Transmission


Zero Locking/Resetting Target Turrets

Adjustable Eyepiece Diopter

Low Profile Illumination Control

Side Parallax Adjustment from 10 Yards to Infinity


ETCHED GLASS MIL-DOT RETICLE
10 YDS TO INFINITY
2-7X44




30MM SCP3-274LA0IEW

ACCUSHOT® 30mm 2-7x44 Long Eye Relief Mil-dot Reticle Scope

LONG EYE RELIEF SCOUTING SCOPE



Smart Spherical Structure Design for Optimal Zero Hold Under Recoil



Etched Glass Reticle



Side Parallax Adjustment Compatible with Side Wheel Add-on (Sold Separately)

| | |
|--------------------------|--------------------|
| Model # | SCP3-274LA0IEW |
| Magnification | 2x~7x |
| Tube Diameter | 30mm |
| Objective Diameter | 44mm |
| Field of View @100 Yards | 32' ~ 10' |
| Eye Relief | 11" ~ 9.5" |
| Exit Pupil | 22 ~ 6.3mm |
| Click Value @100 Yards | 1/4" |
| Length | 11.5" |
| Weight | 25.4oz |
| Parallax Setting | 10Yds - Infinity |
| Scope Ring SKU | RG2W3154 |
| Scope Ring Specification | 30mm, Med. Profile |
| Batteries | CR2032 3V |

Please refer to P.023 for details.

TS TRUE STRENGTH® PLATFORM

 PRISMATIC REFRACTION

 IE 36 COLOR ILLUMINATION

 BROADBAND MULTI-COATING

 FLIP-OPEN LENS CAPS

 ZERO L/R TURRETS

 TWIST LOCK MOUNTING BASE


 PARTS INCLUDED



Lens Caps




Installation Tool



Bidirectional Mounting Deck



Battery



**ADVANCED
PRISMATIC
DESIGN**

Sophisticated prismatic design provides a super compact optical system without sacrificing optical quality. The distance light needs to travel is achieved after multiple refractions are completed inside the prism.

**50%
SHORTER**




Prismatic design dramatically shortens length compared to traditional 4X powered optics on the market.

**MORE
COMPACT
IN SIZE**



**IE®
ETCHED
GLASS
T-DOT
RETICLE**



**PARALLAX PRESET AT 100 YDS
4X32**

34MM SCP-T4IETDQ

ACCUSHOT® T4 Prismatic 4x32
T-dot Reticle Scope

| | |
|--------------------------|------------------------|
| Model # | SCP-T4IETDQ |
| Magnification | 4x |
| Tube Diameter | 34mm |
| Objective Diameter | 32mm |
| Field of View @100 Yards | 27' |
| Eye Relief | 2.3" |
| Exit Pupil | 8mm |
| Click Value @100 Yards | 1/4" |
| Length | 5.5" |
| Weight | 19.5oz |
| Parallax Setting | 100Yds |
| Mounting Base | Bidirectional QD Mount |
| Batteries | CR1632 |



Please refer to **P.023** for details.

- TS** TRUE STRENGTH® PLATFORM
- IE 36 COLOR ILLUMINATION**
- BROADBAND MULTI-COATING**
- 30MM 1-PIECE MAIN TUBE**
- RINGS & LENS CAPS**
- ZERO L/R TURRETS**
- ANGLED INTEGRAL SUNSHADE**
- SIDE PARALLAX CONTROL**


PARTS INCLUDED



Lens Caps



Installation Tool



Scope Rings



Battery



COMPATIBLE ITEMS



Eye Shade





Side Wheel Add-on (P.047)



**IE® WIRE
MIL-DOT
RETICLE**
10 YDS TO INFINITY
4-16X44

30MM SCP3-U416A01EW

ACCUSHOT® 30mm 4-16x44 Full-size
Mil-dot Reticle Scope



Smart Spherical Structure Design
for Optimal Zero Hold Under Recoil



Zero Locking/Resetting Target
Turrets



Side Parallax Adjustment
Compatible with Side Wheel Add-
on (Sold Separately)



**IE® WIRE
MIL-DOT
RETICLE**
10 YDS TO INFINITY
3-12X44

30MM SCP3-U312AOIEW

ACCUSHOT® 30mm 3-12x44 Mil-dot
Reticle Scope

**WIRE
MIL-DOT
RETICLE**
10 YDS TO INFINITY
3-12X44

30mm SCP3-3124EAOW

ACCUSHOT® 30mm 3-12x44 Mil-dot
Reticle Scope with Picatinny Rings

| Model # | SCP3-U416AOIEW | SCP3-U312AOIEW | SCP3-3124EAOW |
|--------------------------|--------------------|--------------------|--------------------|
| Magnification | 4x~16x | 3x~12x | 3X~12X |
| Tube Diameter | 30mm | 30mm | 30 mm |
| Objective Diameter | 44mm | 44mm | 44 mm |
| Field of View @100 Yards | 24.4' ~ 6.8' | 34.0' ~ 8.5' | 34' ~ 8.5' |
| Eye Relief | 3.2" ~ 3.0" | 3.3" ~ 3" | 3.3" ~ 3" |
| Exit Pupil | 10.2 ~ 2.8mm | 13.1 ~ 3.7mm | 14.7mm ~ 3.7 mm |
| Click Value @100 Yards | 1/4" | 1/4" | 1/4" @100 Yards |
| Length | 15.4" | 14.0" | 12.75" |
| Weight | 23.4oz | 22.7oz | 19.2 oz |
| Parallax Setting | 10Yds - Infinity | 10Yds - Infinity | 10 Yds to infinity |
| Scope Ring SKU | RG2W3154 | RG2W3154 | RG2W3154 |
| Scope Ring Specification | 30mm, Med. Profile | 30mm, Med. Profile | 30mm, Med. Pro. |
| Batteries | CR2032 3V | CR2032 3V | N/A |




BUGBUSTER® OPTICS


Please refer to **P.023** for details.

- TS** TRUE STRENGTH® PLATFORM
- BROADBAND MULTI-COATING
- RINGS & LENS CAPS
- ZERO L/R TURRETS

PARTS INCLUDED

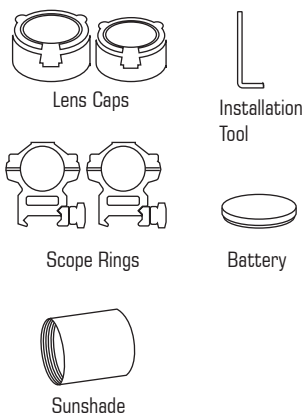

COMPATIBLE ITEMS



Compact Versatility

These lightweight compact 8" overall length scopes feature an impressive parallax adjustment range from 3 yards to infinity and a familiar magnification range making them venerable options. The newest addition to the series is equipped with a larger 30mm main tube and our new etched glass TMOA reticle which features an integral through-the-viewfinder bubble leveler.



Side Parallax Adjustment Models Compatible with Side Wheel Add-on (Sold Separately)



Zero Locking/Resetting Target Turrets



Compact 8 Inch Overall Length



3 YDS TO INFINITY
3-12X32

1" SCP-M312A0D

BUGBUSTER® 1 inch 3-12x32 Mil-dot
Reticle Compact Scope with Dovetail
Rings

3 YDS TO INFINITY
3-9X32

1" SCP-M392A0LWQ

BUGBUSTER® 1 inch 3-9x32 Mil-dot
Reticle Compact Scope

3 YDS TO INFINITY
3-9X32

1" SCP-M392A0IEWQ

BUGBUSTER® 1 inch 3-9x32 Mil-dot
Reticle Compact Scope

| Model # | SCP-M312A0WQ | SCP-M312A0D | SCP-M392A0LWQ | SCP-M392A0IEWQ |
|--------------------------|------------------|------------------|------------------|------------------|
| Magnification | 3x~12x | 3x~12x | 3x~9x | 3x~9x |
| Tube Diameter | 1" | 1" | 1" | 1" |
| Objective Diameter | 32mm | 32mm | 32mm | 32mm |
| Field of View @100 Yards | 31' ~ 10' | 31' ~ 10' | 37.7' ~ 14' | 37.7' ~ 14' |
| Eye Relief | 4.3" ~ 3.3" | 4.3" ~ 3.3" | 4.2" ~ 3.2" | 4.2" ~ 3.2" |
| Exit Pupil | 10.6 ~ 2.7mm | 10.6 ~ 2.7mm | 10.6 ~ 3.6mm | 10.6 ~ 3.6mm |
| Click Value @100 Yards | 1/3 MOA | 1/3 MOA | 1/4 MOA | 1/4 MOA |
| Length | 8.1" | 8.1" | 8.2" | 8.2" |
| Weight | 12.7oz | 12.7oz | 14oz | 14oz |
| Parallax Setting | 3Yds - Infinity | 3Yds - Infinity | 3Yds - Infinity | 3Yds - Infinity |
| Scope Ring SKU | RQ2W1154 | RT2D1154 | RQ2W1154 | RQ2W1154 |
| Scope Ring Specification | 1", Med. Profile | 1", Med. Profile | 1", Med. Profile | 1", Med. Profile |
| Batteries | N/A | N/A | CR1620 3V | CR1632 3V |



TRUE HUNTER® OPTICS

Please refer to **P.023** for details.

TS TRUE STRENGTH® PLATFORM

 IE 36 COLOR ILLUMINATION

 BROADBAND MULTI-COATING

 1 INCH 1-PIECE MAIN TUBE

 RINGS & LENS CAPS

 ZERO L/R TURRETS

 SUNSHADE INCLUDED


 PARTS INCLUDED



Lens Caps




Installation Tool



Scope Rings



Battery



Sunshade
(50mm Objective
Scopes Only)



COMPATIBLE ITEMS



Eye Shade




**WIRE
MIL-DOT
RETICLE**

5 YDS TO INFINITY

3-9X40

1" SCP-U394AOIEW / SCP-U394AOIED

TRUE HUNTER® 1 inch 3-9x40 Mil-dot Reticle
Scope with Picatinny Rings / Dovetail Rings




**WIRE
MIL-DOT
RETICLE**

5 YDS TO INFINITY

4-16X40

1" SCP-U4164AOIEW

TRUE HUNTER® 1 inch 4-16x40
Mil-dot Reticle Scope





**WIRE
MIL-DOT
RETICLE**

10 YDS TO INFINITY


6-24X50

1" SCP-U6245AOIEW

TRUE HUNTER® 1 inch 6-24x50
Mil-dot Reticle Scope




Smart Spherical Structure Design
for Optimal Zero Hold Under Recoil




Dual and 36 Multi-color Reticle
Illumination



Broadband Multi-coating for
Optimal Light Transmission



TF2+
TURRETS
ZERO LOCKING
PLUS RESETTING

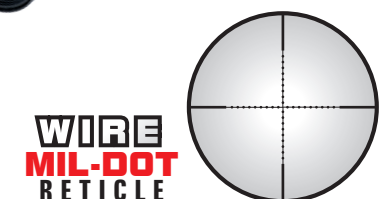


PARALLAX PRESET AT 100 YDS

3-9X40

1" SCP-U394FWT2

TRUE HUNTER® 1 inch 3-9x40 Mil-dot
Reticle Scope with Picatinny Rings

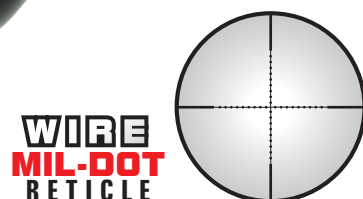


PARALLAX PRESET AT 100 YDS

3-9X40

1" SCP-3940EW

TRUE HUNTER® 1 inch 3-9x40 Mil-dot
Reticle Scope with Picatinny Rings

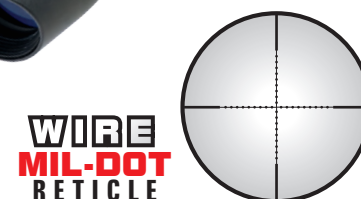

PARALLAX PRESET AT 35 YDS

4X32

1" SCP-U432FD

TRUE HUNTER® 1 inch 4x32 Mil-dot
Reticle Scope with Dovetail Rings


| Model # | SCP-U394AOIEW | SCP-U394AOIED | SCP-U4164AOIEW | SCP-U6245AOIEW | SCP-U394FWT2 | SCP-3940EW | SCP-U432FD |
|--------------------------|------------------|------------------|------------------|------------------|---------------|----------------|---------------|
| Magnification | 3x~9x | 3x~9x | 4x~16x | 6x~24x | 3x~9x | 3X~9X | 4x |
| Tube Diameter | 1" | 1" | 1" | 1" | 1" | 1" | 1" |
| Objective Diameter | 40mm | 40mm | 40mm | 50mm | 40mm | 40 mm | 32mm |
| Field of View @100 Yards | 35.6' ~ 12' | 35.6' ~ 12' | 23.0' ~ 6.0' | 14.4' ~ 4.1' | 35.6' ~ 12' | 35.6' ~ 12' | 32' |
| Eye Relief | 3.9" ~ 3.2" | 3.9" ~ 3.2" | 3.2" ~ 3.0" | 3.2" ~ 3.0" | 3.9" ~ 3.2" | 4.2" ~ 3.4" | 3.4" |
| Exit Pupil | 13 ~ 4.5mm | 13 ~ 4.5mm | 10.0 ~ 2.5mm | 8.3 ~ 2.2mm | 13 ~ 4.5mm | 13 mm ~ 4.5 mm | 8.0mm |
| Click Value @100 Yards | 1/4" | 1/4" | 1/4" | 1/4" | 1/4" | 1/4" | 1/4" |
| Length | 12.6" | 12.6" | 14.5" | 15.2" | 13.1" | 12.25" | 11.8" |
| Weight | 21.1oz | 21.1oz | 22.3oz | 26.5oz | 18.7oz | 15.3 oz | 14.4oz |
| Parallax Setting | 5Yds - Infinity | 5Yds - Infinity | 5Yds - Infinity | 10Yds - Infinity | 100Yds | 100 Yds | 35Yds |
| Scope Ring SKU | RG2W1204 | RGPM-25M4 | RGWM-25H4 | RG2W1204 | RG2W1154 | RGWM-25M4 | RGPM-25M2 |
| Scope Ring Specification | 1", High Profile | 1", High Profile | 1", High Profile | 1", High Profile | 1", Med. Pro. | 1", Med. Pro. | 1", Med. Pro. |
| Batteries | CR2032 3V | CR2032 3V | CR2032 3V | CR2032 3V | N/A | N/A | N/A |



UTG® AIR RIFLE SCOPES & ACCESSORIES



IE®
ETCHED
GLASS
RETICLE



PAGE
031
FOR DETAILS

10 YDS TO INFINITY
3-12X44

30MM OP3-GM3124UMOA

ACCUSHOT® OP3 30mm 3-12X44
UMOA Reticle Scope



IE®
ETCHED
GLASS
RETICLE



PAGE
031
FOR DETAILS


10 YDS TO INFINITY
4-16X44

30MM OP3-GM4164UMOA

ACCUSHOT® OP3 30mm 4-16X44
UMOA Reticle Scope



IE®
WIRE
MIL-DOT
RETICLE



PAGE
031
FOR DETAILS


10 YDS TO INFINITY
3-12X44

30MM SCP3-UM3124AIEW

ACCUSHOT® 30mm 3-12x44
Compact Mil-dot Reticle Scope



IE®
WIRE
MIL-DOT
RETICLE



PAGE
031
FOR DETAILS


10 YDS TO INFINITY
4-16X44

30MM SCP3-UM4164AIEW

ACCUSHOT® 30mm 4-16x44
Compact Mil-dot Reticle Scope



IE®
WIRE
MIL-DOT
RETICLE



PAGE
036
FOR DETAILS

10 YDS TO INFINITY
4-16X44

30MM SCP3-U4164AIEW

ACCUSHOT® 30mm 4-16x44 Full-size
Mil-dot Reticle Scope




IE ILLUMINATION
36 color illumination enhancement.



RED/GREEN/BLACK ILLUMINATION
Selectable red/green illumination with
standard black non-illuminated reticle.



**WIRE
MIL-DOT
RETICLE**



**PAGE
039**
FOR DETAILS


3 YDS TO INFINITY
3-12X32

1" SCP-M312A0D

BUGBUSTER® 1 inch 3-12x32
Mil-dot Reticle Compact Scope with
Dovetail Rings



**WIRE
RGB MIL-DOT
RETICLE**



**PAGE
039**
FOR DETAILS


3 YDS TO INFINITY
3-9X32

1" SCP-M392A0LWQ

BUGBUSTER® 1 inch 3-9x32 Mil-dot
Reticle Compact Scope



**WIRE
IE® MIL-DOT
RETICLE**



**PAGE
039**
FOR DETAILS


3 YDS TO INFINITY
3-9X32

1" SCP-M392A0IEWQ

BUGBUSTER® 1 inch 3-9x32 Mil-dot
Reticle Compact Scope



**WIRE
IE® MIL-DOT
RETICLE**



**PAGE
040**
FOR DETAILS


3 YDS TO INFINITY
3-9X40

1" SCP-U394A0IED

TRUE HUNTER® 1 inch 3-9x40 Mil-dot
Reticle Scope with Dovetail Rings



**WIRE
IE® MIL-DOT
RETICLE**



**PAGE
040**
FOR DETAILS


3 YDS TO INFINITY
4-16X40

1" SCP-U4164A0IEW

TRUE HUNTER® 1 inch 4-16x40
Mil-dot Reticle Scope



**WIRE
MIL-DOT
RETICLE**



**PAGE
041**
FOR DETAILS

PARALLAX PRESET AT 33 YDS
4X32

1" SCP-U432FD

TRUE HUNTER® 1 inch 4x32 Mil-dot
Reticle Scope with Dovetail Rings

SIDE WHEELS

Side Wheel Add-on in
Different Sizes



| ITEM NO. | DESCRIPTION |
|-------------|---|
| SCP-SW060B | 60mm Side Wheel Add-on for SCP3 Series Scopes |
| SCP-SW080B | 80mm Side Wheel Add-on for SCP3 Series Scopes |
| SCP-SW080BB | 80mm Side Wheel Add-on for BUGBUSTER® Scopes with SWAT |
| OP3-SW080 | 80mm Side Wheel Add-on for OP3 Series Scopes |
| SCP-SW100B | 100mm Side Wheel Add-on for SCP3 Series Scopes |

PICATINNY RING TOP, ANTI-CANT LEVELER

REFER TO P.057 FOR DETAILS

NEW



| ITEM NO. | NOTE |
|----------|-------------------------|
| MT-RTR1 | Picatinny 1" Ring Top |
| MT-RTR3 | Picatinny 30mm Ring Top |
| MT-RTR4 | Picatinny 34mm Ring Top |

- Scalloped 2 Slot Picatinny Optic Rail
- Fully Dehorned Corners and Melted Contours Reduce Snag



CROSSBOW & HANDGUN SCOPES

Please refer to **P.023** for details.

TS TRUE STRENGTH® PLATFORM

RGB RED/GREEN/BLACK RETICLE

BROADBAND MULTI-COATING

RINGS & LENS CAPS





RGB

**ETCHED GLASS
130 HUNTER
BUBBLE LEVELER**



**10 YDS TO INFINITY
1.5-6X36**

30mm OP3-G1563CRWQ

OP3 30mm 1.5-6X36 Crossbow Scope, 130 Hunter Reticle

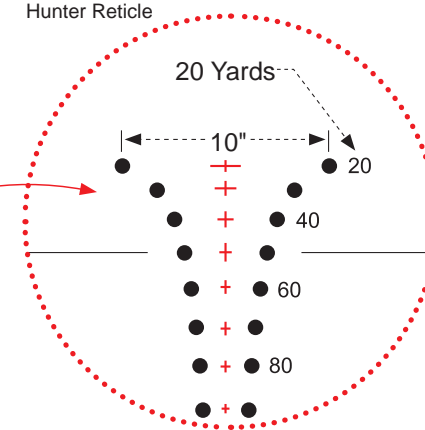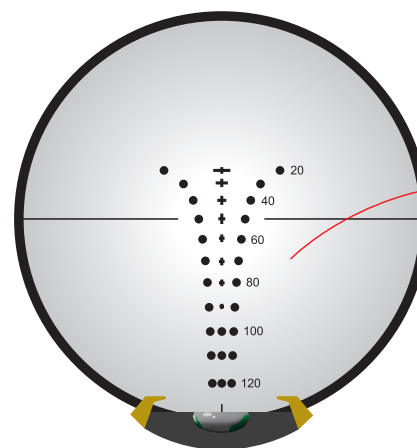


The bubble leveler is internal and is not a separate external attachment. Located unobtrusively at the 6 o'clock position, the bubble leveler aids in correcting any cant the user may have while aiming. Being internal allows the user to focus their attention primarily on the target and reticle, while secondarily allowing for quick cant adjustments by seeing the leveler through their peripherals.

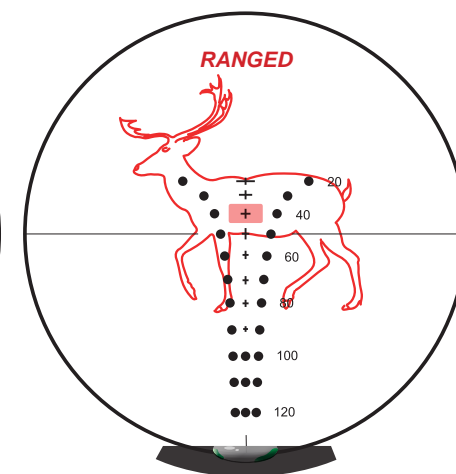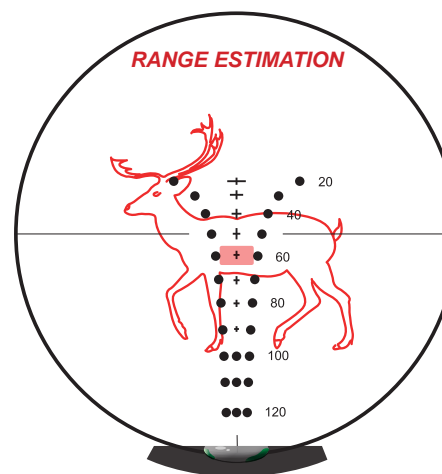

| Model # | OP3-G1563CRWQ | SCP-M4CR5WQ | SCP-27PRGW |
|--------------------------------|----------------------|-----------------|------------------|
| Magnification/FPS Compensation | 1.5X~6X/250~475FPS | 4x | 2x~7x |
| Tube Diameter | 30 mm | 1" | 1" |
| Objective Diameter | 36 mm | 32mm | 32mm |
| Field of View @100 Yards | 52.5 ft ~ 13.98 ft | 27.2' | 19.2' ~ 7' |
| Eye Relief | 5.8 inch ~ 4.25 inch | 3.8" | 25" ~ 13.8" |
| Exit Pupil | 24 mm ~ 6.2 mm | 8mm | 16 ~ 5mm |
| Click Value @100 Yards | 1/2 MOA | 1/4" | 1/4" |
| Length | 8.25 inch | 8.2" | 9.4" |
| Weight | 16 oz | 12.3oz | 14oz |
| Parallax Setting | 10 Yds to infinity | 50Yds | 35Yds |
| Scope Ring SKU | RG2W3154 | RQ2W1104 | RGWM-25M4 |
| Scope Ring Specification | 30mm, Med. Profile | 1", Low Profile | 1", Med. Profile |
| Batteries | CR1632 3V | CR1620 3V | CR1620 3V |



PRO
RGB 5-STEP
RETICLE




PARALLAX PRESET AT 50 YDS


4X32

1" SCP-M4CR5WQ

1 Inch 4x32 Pro 5-step Reticle
Crossbow Scope

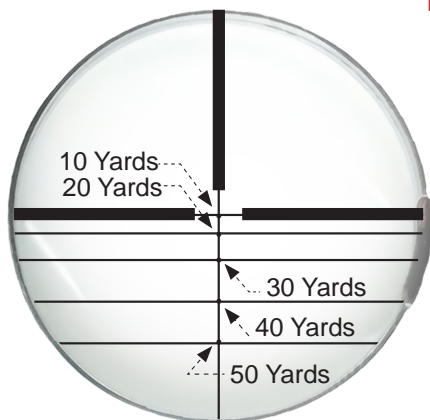

RGB PDC
RETICLE



PARALLAX PRESET AT 33 YDS

2-7X32

1" SCP-27PRGW

1 inch 2-7x32 RGB PDC Reticle
Handgun Scope

